ONLY 6kgs per m²

LIGHTWEIGHT TILES LTD

BEFORE

AFTER

THE **LIGHTWEIGHT** ROOFING SYSTEM

LIGHTWEIGHT TILES LTD

138 Lydney Harbour Estate,
Harbour Road,
Lydney,
Gloucestershire GL15 4EJ
t: **01594 715777**
e: info@lightweighttiles.co.uk

graphics-shack.co.uk

www.**lightweight**tiles.co.uk

Lightweight tiles...

All of our roofing products are hand-made ensuring the highest quality finish. The tiles are coated in a textured granulate giving a very realistic stone finish. The system is available in five colours. We also offer a budget tile with a smooth UV-protected surface.

Roofing Tile
118cm x 36cm
2mm thick

Round Ridge
Length: 40cm
Width: ±15cm
Height: ±8cm
Usable surface: 36cm

End Cap
Fits over the end of the ridge tile and forms a perfect seal

Dry Verge
Length: 111cm
Width: 10.7cm
Height: 12cm
Usable surface: 94cm

Plastic Coated Screws
(Available colour coded)
40 x (4.0 x 45)

This roofing system is made from a mixture of virgin and recycled polypropylene plastic, resulting in an incredibly tough, durable, lightweight roofing solution.
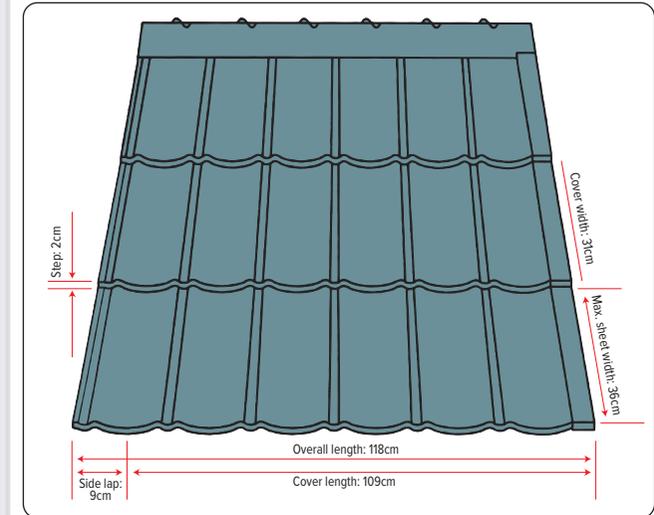
KEY FEATURES:

- Ultra lightweight - *only 6kgs per m²*
- Fast and easy installation
- Able to be installed from a roof inclination of 10°
- Easy to saw and cut
- Mountable from 8°C to 50°C
- Fully weather resistant to -20°C
- UV resistant and colour fast
- Excellent sound absorption
- Non corrosive
- Good thermal insulation
- Durable
- Guaranteed for 25 years

ENVIRONMENT-FRIENDLY · RECYCLED · DURABLE

Slate Grey

Forest Green

Autumn Brown

Terracotta Red

Barley Straw

TECHNICAL DATA
FOR FULL DETAILS, SEE OUR WEBSITE

Min pitch	10°
Max pitch	85°
Overall length	118cm
Cover length	109cm
Side lap	9cm
Overall width	36cm
Cover width	31cm
Step	2cm
Weight	2.0kg
Top coat	Coarse granulate
Water absorption	ISO62 <0.5%
Durability	96 hours 95°C 95% R.H.
Fixing	3 Screws per tile

3 tiles = 1m²

1m²

Fast and easy to install

Step: 2cm
Cover width: 31cm
Max. sheet width: 36cm
Overall length: 118cm
Side lap: 9cm
Cover length: 109cm

25 YEARS GUARANTEE

See our website for a video showing the strength and durability of our product.