





LIGHTWEIGHT TILES LTD
 138 Lydney Harbour Estate,
 Harbour Road,
 Lydney,
 Gloucestershire GL15 4EJ
 t: 01594 715777
 e: info@lightweighttiles.co.uk



THE LIGHTWEIGHT ROOFING SYSTEM

www.lightweighttiles.co.uk

graphics-shack.co.uk

Lightweight tiles...

All of our roofing products are hand-made ensuring the highest quality finish. The tiles are coated in a textured granulate giving a very realistic stone finish. The system is available in five colours. We also offer a budget tile with a smooth UV-protected surface.



Roofing Tile
118cm x 36cm
2mm thick



Round Ridge
Length: 40cm
Width: ±15cm
Height: ±8cm
Usable surface: 36cm



End Cap
Fits over the end of the ridge tile and forms a perfect seal



Dry Verge
Length: 111cm
Width: 10.7cm
Height: 12cm
Usable surface: 94cm



Plastic Coated Screws
(Available colour coded)
40 x (4.0 x 45)

This roofing system is made from a mixture of virgin and recycled polypropylene plastic, resulting in an incredibly tough, durable, lightweight roofing solution.


KEY FEATURES:

- Ultra lightweight - *only 6kgs per m²*
- Fast and easy installation
- Able to be installed from a roof inclination of 10°
- Easy to saw and cut
- Mountable from 8°C to 50°C
- Fully weather resistant to -20°C
- UV resistant and colour fast
- Excellent sound absorption
- Non corrosive
- Good thermal insulation
- Durable
- Guaranteed for 25 years



TECHNICAL DATA FOR FULL DETAILS, SEE OUR WEBSITE

Min pitch	10°	 <i>Fast and easy to install</i>
Max pitch	85°	
Overall length	118cm	
Cover length	109cm	
Side lap	9cm	
Overall width	36cm	
Cover width	31cm	
Step	2cm	
Weight	2.0kg	
Top coat	Coarse granulate	
Water absorption	ISO62 <0.5%	
Durability	96 hours 95°C 95% R.H.	
Fixing	3 Screws per tile	

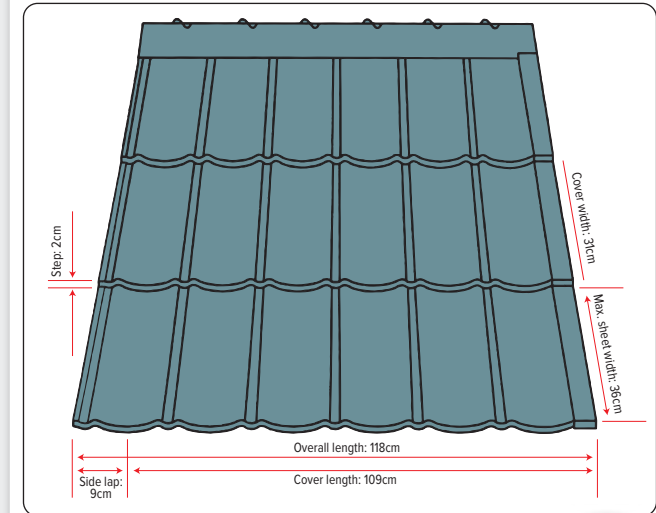

See our website for a video showing the strength and durability of our product.



Our lightweight roofing tiles recently passed Q-Lab's ISO 877-2:2009 direct weathering test for UV resistance

